


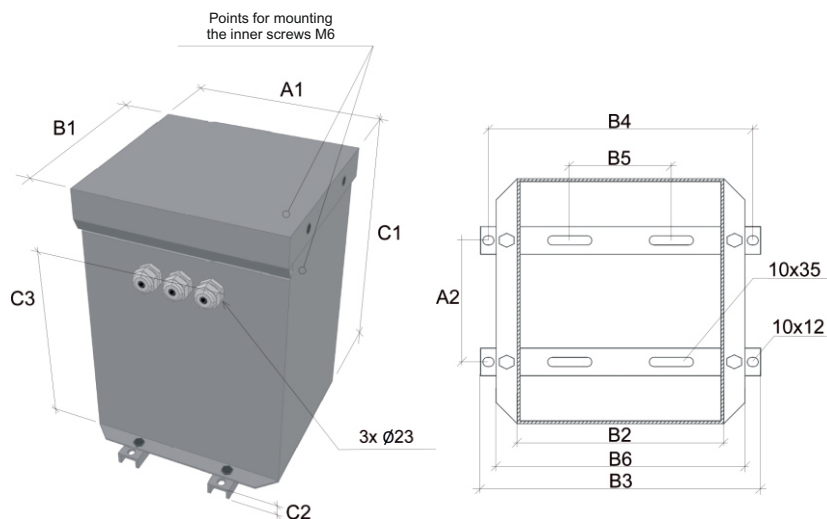

UMD/2 transformers could also be delivered in B1U housing with IP23 protection grade. Thermal class for transformer and housing set is 30°C.

Type	Housing	Dimensions [mm]											Total weight [kg]
		A1	A2	B1	B2	B3	B4	B5	B	C1	C2	C3	
UMD 2,5/2	B1U 150/01/IP23	250	124	240	215	310	280	130	260	360	20	275	50
UMD 3,15/2	B1U 180/01/IP23	300	144	265	240	335	305	130	285	410	20	325	70
UMD 4,0/2	B1U 180/01/IP23	300	144	265	240	335	305	130	285	410	20	325	70
UMD 5,0/2	B1U 180/01/IP23	300	144	265	240	335	305	130	285	410	20	325	70
UMD 6,3/2	B1U 210/01/IP23	350	176	285	260	355	325	130	305	460	20	375	100
UMD 8,0/2	B1U 210/01/IP23	350	176	285	260	355	325	130	305	460	20	375	100
UMD 10,0/2	B1U 210/01/IP23	350	176	285	260	355	325	130	305	460	20	375	100