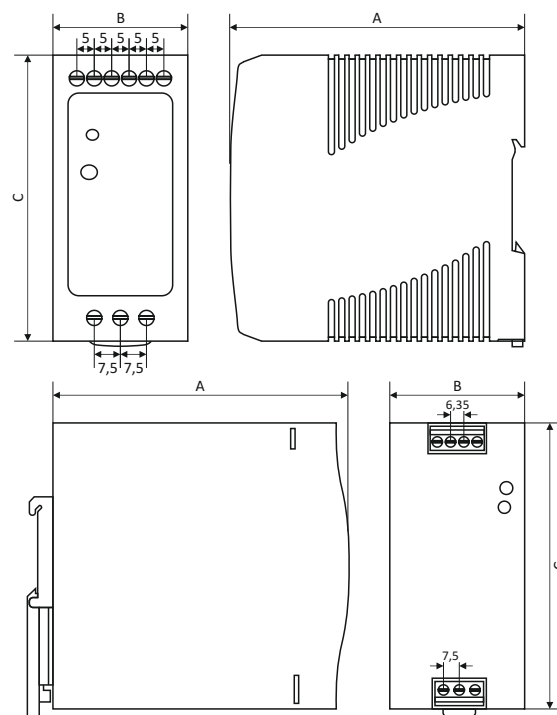


KSE 040
KSE 060KSE 120
KSE 240

Power: **40; 60; 120; 240W**
 Rated voltage PRI: **90 - 264V 47/63Hz**
 Rated voltage SEC: **12; 24V**
 Efficiency: **84 - 87% (typical)**

Stabilized, direct current output power supplies designed for assembly in general electric installations on T-35 bus. Equipped with LED diode signaling activation and overload, cooled by natural air flow. The 240W power supplies are additionally equipped with the PFC power factor improvement system. Overcurrent, short circuit and thermal protection. Manufactured with IP20 protection grade. Manufactured in compliance with EN55032, EN61000-3-2, EN61000-3-3, EN55035, EN60950-1.

Type	Power	Current	Dimensions [mm]			Weight [kg]
	[W]	[A]	A	B	C	
KSE 04024N	40	1,7	90	30,8	64,5	0,32
KSE 06024N	60	2,5	90	30,8	64,5	0,35
KSE 12024N	120	5	90	39,5	124	0,65
KSE 24024N	240	10	90	62,5	124	1,08
KSE 04012N	40	3,3	90	30,8	64,5	0,32
KSE 06012N	60	5	90	30,8	64,5	0,35
KSE 12012N	120	10	90	39,5	124	0,65
KSE 24012N	240	20	90	62,5	124	1,08