




OIEA 1


OIEA 3;
6; 8; 15

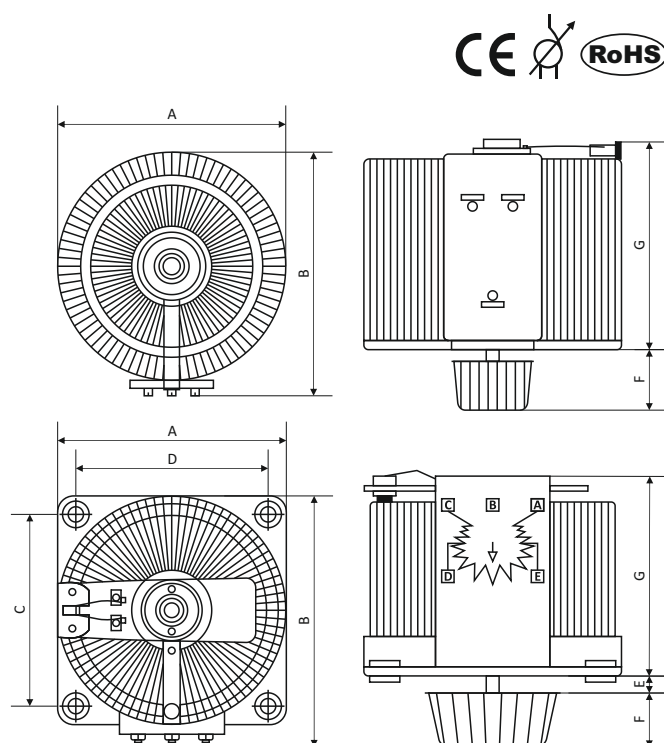

Rated voltage PRI: **230V**
 Rated voltage SEC: **0 - 260V**
 Frequency: **50 - 300Hz**
 Output current: **1; 2,8; 5; 6,5; 12A**

Regulating, open build autotransformers for non-step input voltage regulation in electrical and industrial installation or devices. Protection grade IP00. Maximum ambient temperature 45°C. Intended for table mounting. Manufactured in compliance with EN61558-1, EN61558-2-14.

WIRING DIAGRAM

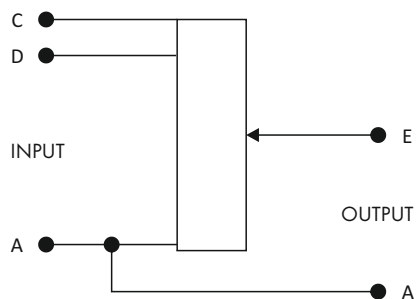

Type	Current	Max current	Dimensions [mm]						Weight [kg]
	[A]	[A]	A	B	C=D	E	F	G	
OIEA 1	1,0	1,0	83	99	x	x	25	75	1,60
OIEA 3	2,8	3,0	110	120	92	6	25	75	3,30
OIEA 6	5,0	6,0	175	200	146	6	35	110	6,80
OIEA 8	6,5	8,0	175	200	146	6	35	130	8,00
OIEA 15	12,0	15,0	225	250	176	10	35	135	13,50