


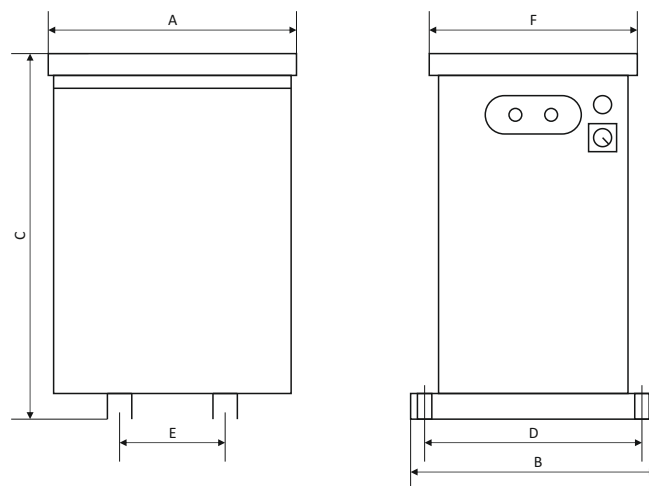

Rated power: **25 - 69kVA**
 Rated voltage PRI: **3 x 400V 50/60Hz**
 Rated voltage SEC: **3 x 200V**

Three-phase, encased, voltage matching autotransformers for Japanese or Korean 400/200V machines. Equipped with ON-OFF connector and light signaling. The transformers are made with Class I insulation and protection grade IP23. Maximum ambient temperature 40°C, thermal class of insulation F (155°C). Manufactured in compliance with EN61558.

Type	Power	Dimensions [mm]						Mounting	Weight [kg]
	[kVA]	A	B	C	D	E	F		
PA3M 25002	25,0	570	460	580	390	316	360	M12	120
PA3M 40002	40,0	570	460	580	390	316	360	M12	170
PA3M 50002	50,0	750	540	800	490	450	460	M12	193
PA3M 70002	69,0	810	715	800	684	450	625	M12	277