
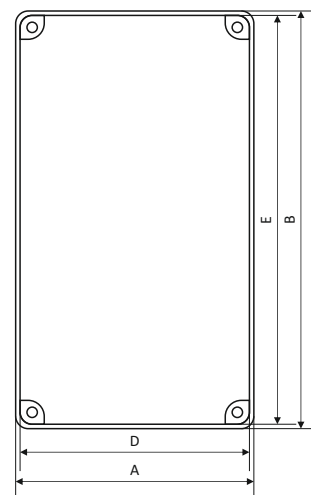




Rated power: **100 - 500VA**
 Rated voltage PRI: **230V 50/60Hz**
 Rated voltage SEC: **12; 24V**

Encased protective transformers designed for applications requiring high protection grade against electric shock. Stationary, free-standing or wall mounted version. The transformers are made with Class II insulation and protection rating of IP65, maximum ambient temperature 40°C, thermal classification: B (130°C). Manufactured in compliance with EN61558-1 and EN61558-2-6.

Type	Power	Dimensions [mm]					Mounting	Weight [kg]
	[VA]	A	B	C	D	E		
PVST 100	100	118	158	76	97	137	M4	1,60
PVST 200	200	148	198	76	127	177	M4	2,99
PVST 300	300	148	198	96	127	177	M4	3,60
PVST 400	400	198	248	86	177	227	M4	4,57
PVST 500	500	198	248	86	177	227	M4	5,57