


TTH

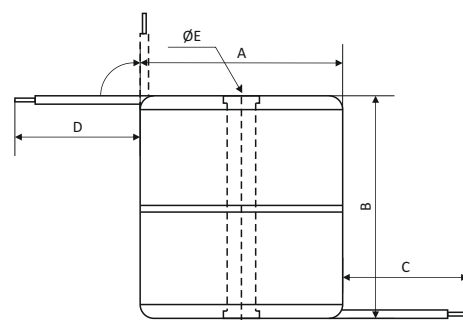

PVH

Rated power: **50 - 300VA (TTH); 40 - 60VA (PVH)**
 Rated voltage PRI: **230V 50/60Hz**
 Rated voltage SEC: **11,5V**

Transformers designed especially for powering 12V halogen lighting systems (short circuit and overload protection). TTH and PVH types feature small dimensions, weight and losses while retaining favourable price. PVH are recommended for use in lighting systems fitted in false ceilings as they can be fitted through standard 60 mm lamp holes. The transformers are made with Class II insulation and protection grade IP00 for TTH and IP30 for PVH. Maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN61558-2-6.

Type	Power	Dimensions [mm]					Mounting	Weight [kg]
	[VA]	A	B	C	D	E		
PVH 40	40	59	61	120	120	5,5	M5	0,60
PVH 50	50	59	61	120	120	5,5	M5	0,64
PVH 60	60	59	61	120	120	5,5	M5	0,70

Type	Power	Dimensions [mm]					Mounting	Weight [kg]
	[VA]	A	B	C	D	E		
TTH 50	50	80	33	120	120	6,4	M6	0,60
TTH 60	60	80	37	120	120	6,4	M6	0,65
TTH 105	105	93	40	120	120	6,4	M6	1,00
TTH 120	120	95	42	120	120	6,4	M6	1,05
TTH 150	150	95	47	120	120	6,4	M6	1,20
TTH 200	200	103	52	120	150	6,4	M6	1,60
TTH 250	250	117	54	120	150	6,4	M6	2,00
TTH 300	300	117	59	120	150	6,4	M6	2,30