


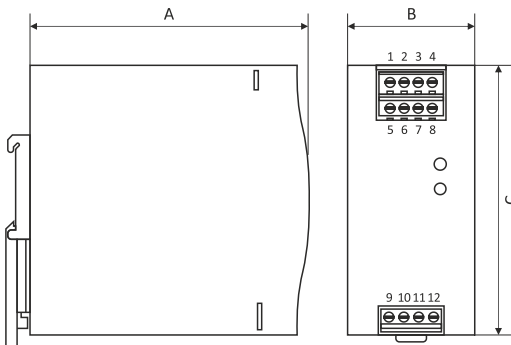

KSRM 20-12; KSRM 20-24; KSRM 40-12;
KSRM 40-24

Input voltage: 12; 24V
Output voltage: 12; 24V
Efficiency: 98%

Features:

- supports 1+1 and N+1 redundant systems,
- output current 20A and 40A,
- efficient cooling thanks to free air flow,
- suitable for redundant operation in 12V and 24V systems,
- mounted on a TS35/7.5 or 15 DIN rail.

Description:

The KSRM series redundancy modules are designed to ensure the reliability and continuity of power supply systems. They support 1+1 and N+1 redundancy configurations and offer two supply voltage variants (12V and 24V) and two current variants (20A and 40A). Thanks to effective cooling, they provide stable operation in various conditions. The KSRM modules are equipped with alarm contacts for two separate input channels, signaling the lack of power in a given channel.

Applications:

- industrial automation and production lines,
- monitoring infrastructure security, alarm systems,
- critical and sensitive systems such as IT infrastructure, server rooms, data centers.

Type	Output voltage	Current	Dimensions [mm]			Weight [kg]
	[V]	[A]	A	B	C	
KSRM 12VDC 20A	12	0-20	102	32	125,2	0,35
KSRM 24VDC 20A	24	0-20	102	32	125,2	0,35
KSRM 12VDC 40A	12	0-40	102	55	125,2	0,5
KSRM 24VDC 40A	24	0-40	102	55	125,2	0,5



ul. Postępową 25/27, 93-347 Łódź, Poland
tel. (42) 640-15-39, fax: (42) 640-15-41
sales@brevetrafo.com, www.brevetrafo.com

Due to the constant development of the construction and changes in technical requirements, Breve Tufvassons reserves the right to change the above parameters.