


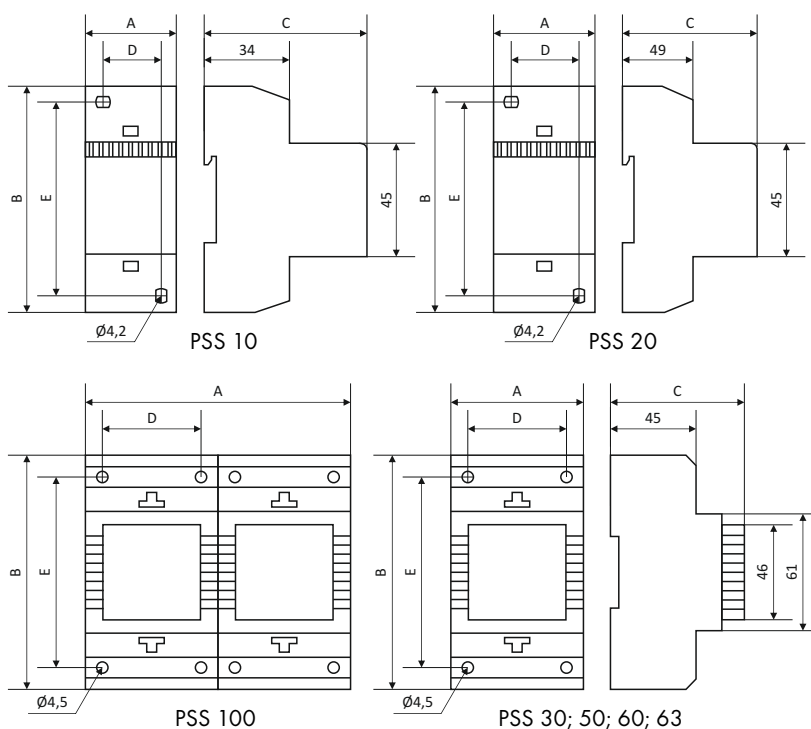

Rated power: **10 - 100VA**
 Rated voltage PRI: **110 - 500V 50/60Hz**
 Rated voltage SEC: **6 - 250V**

Encased protection transformers designed mainly for fitting into devices using T-35 bus. Elegant casing, featuring spring bracket significantly facilitates and speeds up attaching. The transformers are made with Class II insulation and protection grade IP30 or IP40 (PSS 10, PSS 20). Protected against overload and short circuit with fuse time-lag or PTC (PSS 10, PSS 20 - to reset the protecting device disconnect the mains for 10 seconds). Maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN61558-2-4 and EN61558-2-6.

Type	Power	Dimensions [mm]					Weight [kg]
	[VA]	A	B	C	D	E	
PSS 10	10	35	92	66	24	79	0,32
PSS 20	20	53	110	66	40	88	0,56
PSS 30	30	72	110	63	52	98	0,90
PSS 50	50	72	110	72	52	98	1,10
PSS 60	60	72	110	72	52	98	1,20
PSS 63	63	72	110	72	52	98	1,20
PSS 100	100	144	110	72	52	98	2,20