

Voltage controller with own power source

CE

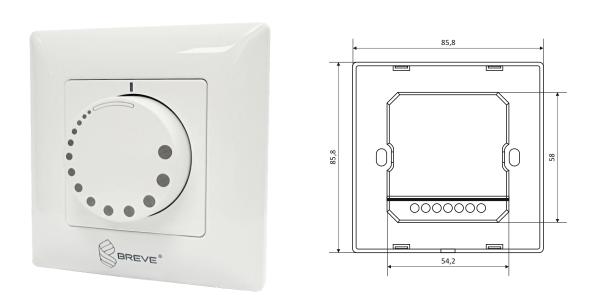




Power supply: 230V 50/60Hz Potentiometer: 10kOhm +-20%

Controller is designed to control the speed of ventilators equipped with electronically commutated motors (EC) or other devices controlled by 0-10VDC signal. Required power supply is 230VAC 50/60Hz. The output is a 0-10V signal, controlled by a knob on the front of the housing. The voltage controller has an additional, unregulated AC output (max. 3A). "0" position turns off control output and additional unregulated AC output. Controller has a fuse T1,5A for overcurrent protection. Protection grade IP20 (flush mounting). Ambient temperature from -30°C to +55°C.

Manufactured in compliance with: EN IEC 55015:2019+A11:2020, EN60669-1:2018, EN60669-2-1:2004+A1:2009+A12:2010, EN IEC 61000-3-2:2019, EN61000-3-3:2013+A1:2019, EN61547:2009.

WIRING DIAGRAM



ul.. Postępowa 25/27, 93-347 Łódź, Poland tel. (42) 640-15-39, fax: (42) 640-15-41 sales@brevetrafo.com, www.brevetrafo.com Due to the constant development of the construction and changes in technical requirements, Breve Tufvassons reserves the right to change the above parameters.