
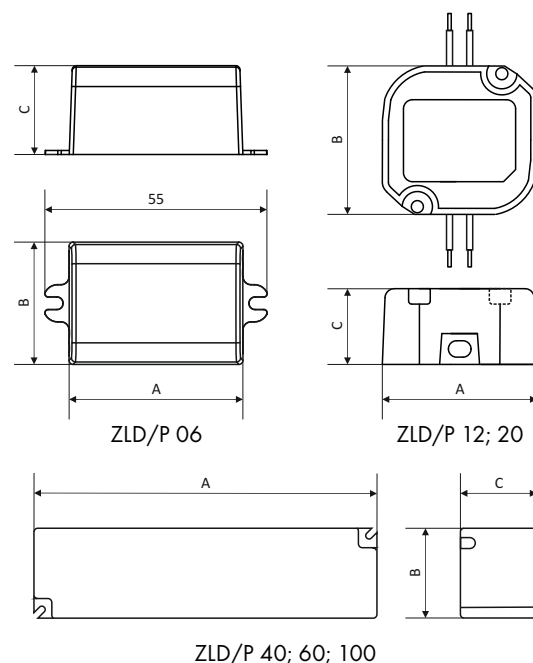




Rated power: **6 - 100W**
 Rated voltage PRI: **220 - 240V 50/60Hz**
 Rated voltage SEC: **12; 24V DC**

Electronic pulse power supplies with 12V or 24V voltage designed especially to supply LED light sources (assemblies, modules, belts, bands, strips). The increased class of resistance to environmental conditions (IP65) allows the use of power supplies in places with increased risk of humidity (kitchen, bathrooms). All power supplies are equipped with 20 cm connection cables on the PRI and SEC sides. In addition, they have a built-in PFC filter (40W and up). Made in II class insulation and IP65 protection class, max. ambient temperature 40°C. Protection against: overvoltage, short-circuit, overheating, overload. Made in accordance with EN61347-1, EN61347-2-13, EN55015, EN61000-3-2, EN61000-3-3, EN61547.

Type	Power	Current for Usek	Dimensions [mm]			Weight [kg]
	[W]	[A]	A	B	C	
ZLDP 06-12 YCL	6	0,50	43	29	22	0,04
ZLDP 12-12 YCL	12	1,00	50	50	24	0,10
ZLDP 20-12 YCL	20	1,66	59	59	28	0,15
ZLDP 40-12 YCL	40	3,33	148	40	30	0,30
ZLDP 60-12 YCL	60	5,00	163	43	33	0,39
ZLDP 100-12 YCL	100	8,33	190	53	37	0,63

Type	Power	Current for Usek	Dimensions [mm]			Weight [kg]
	[W]	[A]	A	B	C	
ZLDP 06-24 YCL	6	0,25	43	29	22	0,04
ZLDP 12-24 YCL	12	0,50	50	50	24	0,10
ZLDP 20-24 YCL	20	0,83	59	59	28	0,15
ZLDP 40-24 YCL	40	1,66	148	40	30	0,30
ZLDP 60-24 YCL	60	2,50	163	43	33	0,40
ZLDP 100-24 YCL	100	4,16	190	53	37	0,65